




TECHNOTES

Using port 2 of the D0-05 to Communicate to a printer/data terminal

Product Group: D0-05 All Versions
Information Type: Communications
Last revised : 23 Aug, 2002

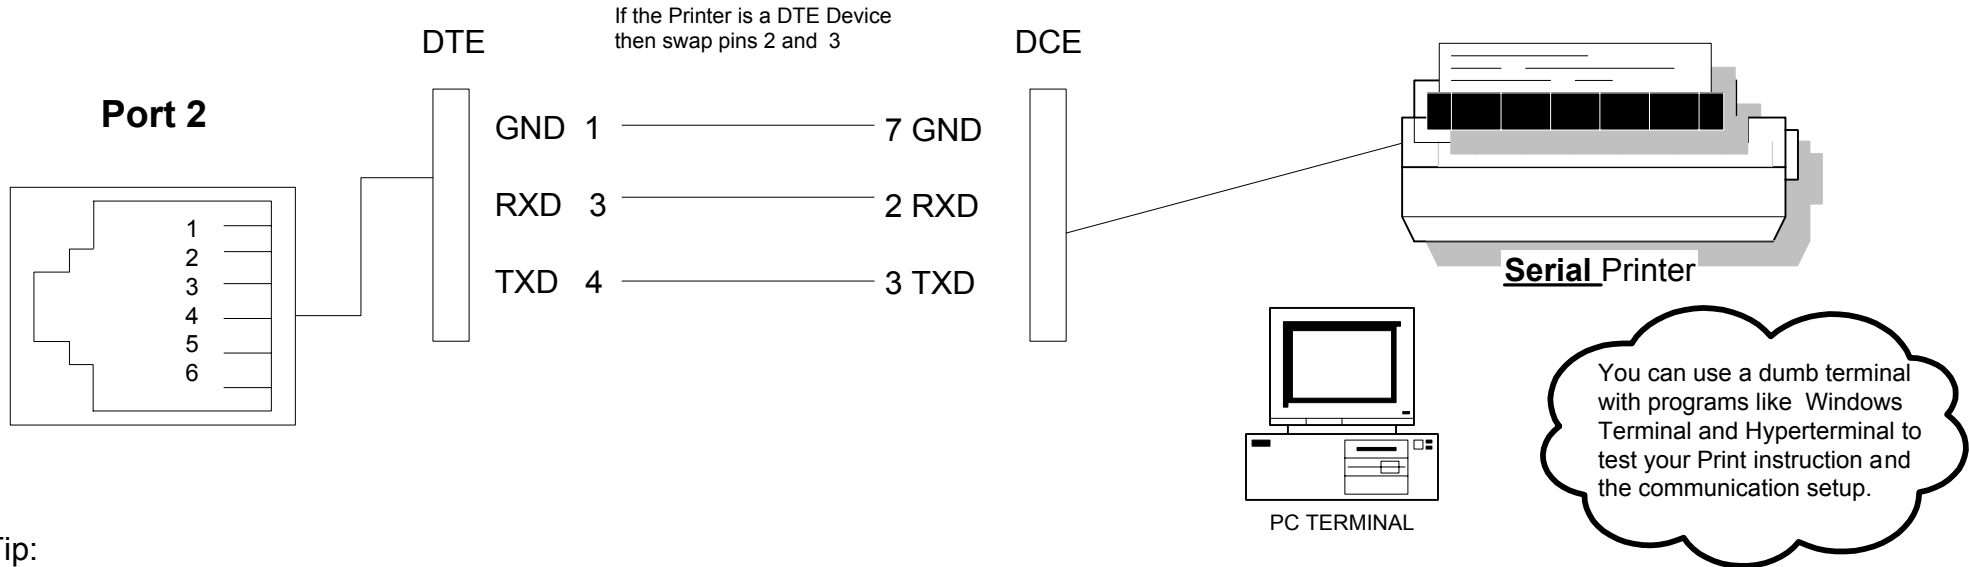

Tip:
The D2-DSCBL cable can be used to connect the CPUs to most Serial printers. You may have to use a Null Modem adapter to swap pins 2 and 3 depending on your printer or Terminal device.

Make sure that Port 2 has been configured in the CPU, and that the settings match the port on the communication device being used. (Baud rate, parity, data bits, etc.etc...)

Directsoft port setup screen

