




PRODUCT ADVISORY

Products: D2-DSCBL-2 Cables
Subject: Change to RS422 signal description
Number: PA-D2-014
Date Issued: 10/8/07
Revision: Rev B

Products Affected D2-DSCBL-2 Cables

Description of Problem Wherever 'RS422' appears, it is to be replaced with 'RS422 / RS485'.

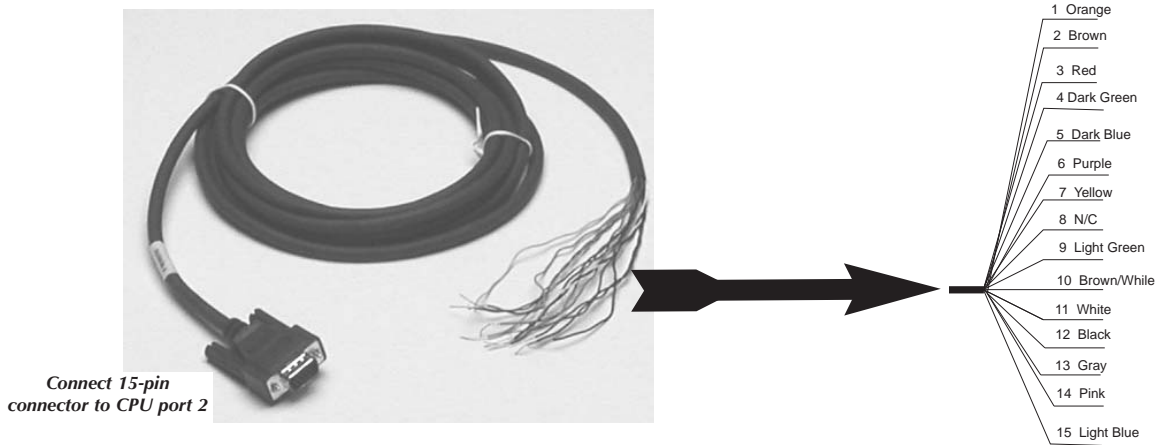

Pin Number	Signal	Pin-to-Wire Color (date codes prior to 2/02)	Pin-to-Wire Color (date codes 2/02 and later)
1	5 VDC	Black	Orange
2	TXD RS232	Brown	Brown
3	RXD RS232	Brown/White	Red
4	RTS RS232	Red	Dark Green
5	CTS RS232	Red/White	Dark Blue
6	- RXD RS422 / RS485	Orange	Purple
7	0V Logic Ground	Black/White	Yellow
8	0V Logic Ground	N/C	N/C
9	+ TXD RS422 / RS485	Yellow	Light Green
10	- TXD RS422 / RS485	Yellow/White	Brown/White
11	+ RTS RS422 / RS485	Green	White
12	- RTS RS422 / RS485	Green/White	Black
13	+ RXD RS422 / RS485	Orange/White	Gray
14	+ CTS RS422 / RS485	Blue	Pink
15	- CTS RS422 / RS485	Blue/White	Light Blue

Technical Assistance

If you have any questions regarding this Product Advisory please contact us at 770-844-4200 for further assistance.

