



Member of the FM Global Group

FM Approvals  
1151 Boston Providence Turnpike  
P.O. Box 9102 Norwood, MA 02062 USA  
T: 781 762 4300 F: 781-762-9375 www.fmapprovals.com

# CERTIFICATE OF COMPLIANCE

## HAZARDOUS (CLASSIFIED) LOCATION ELECTRICAL EQUIPMENT

This certificate is issued for the following equipment:

**9002/ab-c-d-e. Intrinsic Safety Barrier.**

NI/II/2/ABCD/T4 Ta = 60°C; I/2/IIC/T4; AIS/I,II,III/1/ABCDEFG; [I/0]/AEx [ia] IIC - Entity, 90 026 11 31 1;

a = Channel A (Terminals 3 to Gnd): 0 (negative), 1 (positive), 2 (ac), 3 (diode return +), 4 (diode return -), 7 (star connected).

b = Channel B (Terminals 4 to Gnd): 0 (negative), 1 (positive), 2 (ac), 3 (diode return +), 4 (diode return -), 7 (star connected).

c = Safe maximum voltage for interconnection of channels A & B in 1/10V.

d = Safe short circuit current for interconnection of channels A & B in mA.

e = Suffix 001, 021, 041 or 111.

**Special Conditions of Use:**

1. The apparatus shall be installed in a suitable enclosure in accordance with the applicable requirements of the National Electrical Code, ANSI/NFPA 70, and ANSI/ISA-S82.02.01-1999 and ISA S82.03.

### Equipment Ratings:

Nonincendive apparatus for use in Class I, Division 2, Group A, B, C, D and Class I, Zone 2, Group IIC with intrinsically safe connections for Class I, II, III, Division 1, Groups A, B, C, D, E, F, G and Class I, Zone 0, Group IIC hazardous (classified) locations when installed in accordance with Certification Drawing 90 026 11 31 1.

### FM Approved for:

R. STAHL Schaltgeraete GmbH  
Am Bahnhof 30  
D-74638 Waldenburg, Germany



Member of the FM Global Group

This certifies that the equipment described has been found to comply with the following Approval Standards and other documents:

Class 3600	1998
Class3610	2010
Class 3611	1999
Class 3810	1998
including Supplement #1	2005

Original Project ID: 3010778


Approval Granted: May 29, 2001

Subsequent Revision Reports / Date Approval Amended

Report Number	Date	Report Number	Date
090216	May 14, 2009		
110214	March 22, 2011		

FM Approvals LLC

  
 Patrick Byrne  
 Technical Team Manager


  
 Date

The copying, distribution and utilization of this document as well as the communication of its contents to others without expressed authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or ornamental design registration.

Class I, II, III, Div. 1, Group A - G  
or Class I, Zone 0, Group IIC/IIB  
Hazardous Locations

Nonhazardous or Class I, Div. 2, Group A, B, C, D  
or Class I, Zone 2, Group IIC  
Hazardous Locations

Intrinsically Safe Apparatus  
or Simple Apparatus

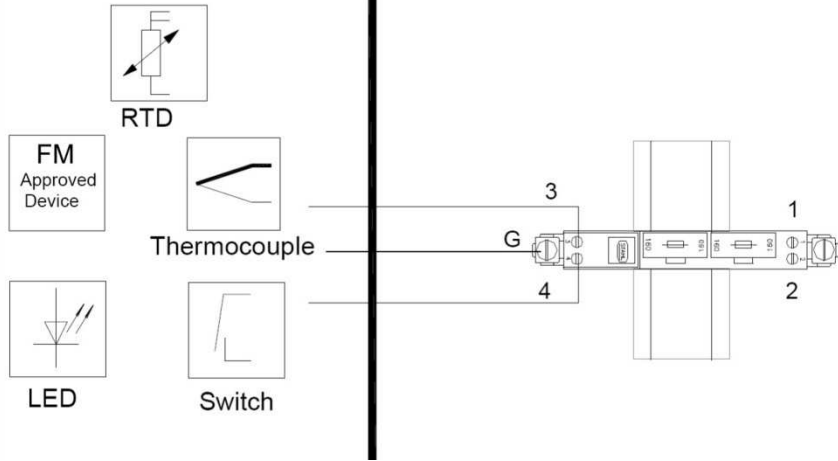

The Intrinsic Safety Barriers are associated apparatus located in a Nonhazardous or Class I, Div. 2, Group A, B, C, D or Class I, Zone 2, Group IIC locations and provide intrinsically safe connections for device(s) located in Class I, Div. 1, Group A, B, C, D; Class II, Div. 1, Group E, F & G; Class III, Div. 1; or Class I, Zone 0, Group IIC/IIB Hazardous (Classified) Locations.

Notes:

- Intrinsically safe apparatus may be switches, thermocouples, LEDs, RTDs, or a FM Approved System or Entity device connected in accordance with the manufacturer's installation instructions.
- For Entity concept use the appropriate parameters from above to ensure the following:
 
$$V_t \text{ or } V_{OC} \leq V_{max} \quad C_a \geq C_i + C_{leads}$$

$$I_t \text{ or } I_{SC} \leq I_{max} \quad L_a \geq L_i + L_{leads}$$
- Electrical apparatus connected to non-IS side of barrier should not use or generate voltages > 250 V ( $U_{max}$ ).
- Installation should be in accordance with Article 504/505 of the National Electrical Code, ANSI/NFPA 70 and ANSI/ISA RP 12.6.
- Use a general purpose enclosure meeting the requirements of ANSI/ISA S82.02.01 for use in nonhazardous locations.
- Maximum barrier operating temperature is 60°C except as follows:  
 $T_a = 50^\circ\text{C}$ : 9002/77-220-146-001  
 9002/77-220-296-001

**WARNING:** To prevent ignition of flammable or combustible atmospheres disconnect power before servicing

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadensersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Geschmacksmustererträge vorbehalten.

F 4830 503

			2001	Date	Name	Certification drawing Intrinsic Safety Barrier (ATEX) Type 9002/...-...-... 1	Scale
			Drawn by	5/01	Tobey		none
			Checked	5/01	Feindel		Sheet 1 of 4
						90 026 11 31 1	Agency
02	14.03.11	Reistle					FM
01	06.03.09	Einsiedler					
Index	Date	Name	Rep. f.			Rep. t.	A4





The copying, distribution and utilization of this document as well as the communication of its contents to others without expressed authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or ornamental design registration.

BARRIER PART NO	TERMINAL	V <sub>OC</sub> (V)	I <sub>SC</sub> (mA)	P <sub>max</sub> (W)	Grps. A, B, E	Grps. C, D, F, G
		U <sub>O</sub> (V)	I <sub>O</sub> (mA)	P <sub>O</sub> (W)	Grp. IIC	Grp. IIB/IIA
					L <sub>a</sub> /C <sub>a</sub> (mH/μF)	L <sub>a</sub> /C <sub>a</sub> (mH/μF)
9002/77-093-040-001	3 to GND	9.3	20	0.05	90 / 4.1	330 / 31
	4 to GND	9.3	20	0.05	90 / 4.1	330 / 31
	3 & 4	V <sub>t</sub> = 9.3	I <sub>t</sub> = 40	0.09	23 / 4.1	87 / 31
9002/77-093-300-001	3 to GND	9.3	150	0.35	1.3 / 4.1	7 / 31
	4 to GND	9.3	150	0.35	1.3 / 4.1	7 / 31
	3 & 4	V <sub>t</sub> = 9.3	I <sub>t</sub> = 300	0.7	0.2 / 4.1	1.8 / 31
9002/77-100-400-001	3 to GND	10	200	0.5	0.5 / 3	4 / 20.2
	4 to GND	10	200	0.5	0.5 / 3	4 / 20.2
	3 & 4	V <sub>t</sub> = 10	I <sub>t</sub> = 400	1	0.15 / 3	0.8 / 20.2
9002/77-150-300-001	3 to GND	15	150	0.56	1.3 / 0.58	7 / 3.55
	4 to GND	15	150	0.56	1.3 / 0.58	7 / 3.55
	3 & 4	V <sub>t</sub> = 15	I <sub>t</sub> = 300	1.13	0.2 / 0.58	1.8 / 3.55
9002/77-220-146-001	3 to GND	22	73	0.4	7 / 0.165	26 / 1.14
	4 to GND	22	73	0.4	7 / 0.165	26 / 1.14
	3 & 4	V <sub>t</sub> = 22	I <sub>t</sub> = 146	0.8	1.4 / 0.165	7.4 / 1.14
9002/77-220-296-001	3 to GND	22	148	0.81	1.35 / 0.165	7.2 / 1.14
	4 to GND	22	148	0.81	1.35 / 0.165	7.2 / 1.14
	3 & 4	V <sub>t</sub> = 22	I <sub>t</sub> = 296	1.63	0.24 / 0.165	1.84 / 1.14
9002/77-280-094-001	3 to GND	28	47	0.33	10.1 / 0.083	30 / 0.65
	4 to GND	28	47	0.33	10.1 / 0.083	30 / 0.65
	3 & 4	V <sub>t</sub> = 28	I <sub>t</sub> = 94	0.66	1.96 / 0.083	12.5 / 0.65

BARRIER PART NO	TERMINAL	V <sub>max</sub> (V)	I <sub>max</sub> (mA)	P <sub>max</sub> (W)	Grps. A, B, E	Grps. C, D, F, G
		U <sub>i</sub> (V)	I <sub>i</sub> (mA)	P <sub>i</sub> (W)	Grp. IIC	Grp. IIB/IIA
					L <sub>a</sub> /C <sub>a</sub> (mH/μF)	L <sub>a</sub> /C <sub>a</sub> (mH/μF)
9002/22-032-300-111	3 & 4	± 4.2	± 150	0.16	0.37 / 1.8	0.5 / 11

Remark: Eventually present internal inductance L<sub>i</sub> and capacitance C<sub>i</sub> have to be subtracted.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadensersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Geschmacksmustereintragung vorbehalten.

F 4830 503


			2001	Date	Name	Certification drawing Intrinsic Safety Barrier (ATEX) Type 9002/...-...-...-... 1	Scale
			Drawn by	5/01	Tobey		none
			Checked	5/01	Feindel		Sheet
						90 026 11 31 1	4 of 4
02	14.03.11	Reistle					Agency
01	06.03.09	Einsiedler					FM
Index	Date	Name				Rep. f.	Rep. t.
							A4



Class I, II, III, Div. 1, Group A - G or  
Class I, Zone 0, Group IIC/IIB Hazardous Locations

Nonhazardous or Class I, Div. 2, Group A, B, C, D or  
Class I, Zone 2, Group IIC Hazardous Locations

Intrinsically Safe Apparatus  
or Simple Apparatus

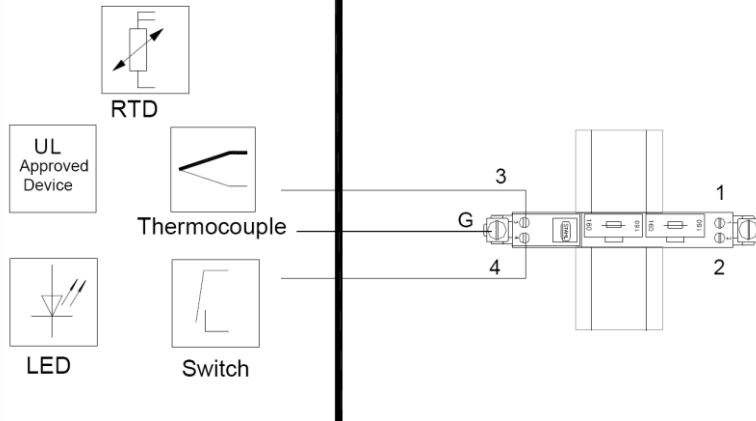

The Intrinsic Safety Barriers are associated apparatus located in Nonhazardous or Class I, Div. 2, Group A, B, C, D, T4 or Class I, Zone 2, Group IIC, T4 locations and provide intrinsically safe connections for device(s) located in Class I, Div. 1, Group A, B, C, D; Class II, Div. 1, Group E, F & G; Class III, Div. 1; or Class I, Zone 0, Group IIC/IIB Hazardous (Classified) Locations.

Notes:

- Intrinsically safe apparatus may be switches, thermocouples, LEDs, RTDs, or a UL Approved System or Entity device connected in accordance with the manufacturer's installation instructions as defined in Article 504.2 and installed and temperature classified in accordance with Article 504.10(B) of the National Electrical Code (ANSI/NFPA 70), or other local codes, as applicable.
- The output current of this associated apparatus is limited by a resistor such that the output voltage-current plot is a straight line drawn between open-circuit voltage and short-circuit current.
- For Entity concept use the appropriate parameters from above to ensure the following:

$$V_t \text{ or } V_{OC} \leq V_{max} \quad C_a \geq C_i + C_{cable} \quad P_o \leq P_{max}, P_i$$

$$I_t \text{ or } I_{SC} \leq I_{max} \quad L_a \geq L_i + L_{cable}$$

Capacitance  $C_{cable}$  and inductance  $L_{cable}$  of the field wiring, plus intrinsically safe equipment capacitance,  $C_i$  and inductance  $L_i$  shall be considered in the calculation above. Where the cable capacitance and inductance per foot are not known, the following values shall be used:  $C_{cable} = 60 \text{ pF/ft.}$ ,  $L_{cable} = 0.2 \text{ } \mu\text{H/ft.}$

- Electrical apparatus connected to non-IS side of barrier should not use or generate voltages  $> 250 \text{ V (} U_{max} \text{)}$ .
- This associated apparatus is open-type and must be installed in an enclosure suitable for the application in accordance with the National Electrical Code (ANSI/NFPA 70), or other local codes, as applicable.
- The associated apparatus must be connected to a suitable ground electrode per the National Electrical Code (ANSI/NFPA 70), or other local installation codes, as applicable. The resistance of the ground path must be less than 1 ohm.
- Where multiple circuits extend from the same piece of associated apparatus, they must be installed in separate cables or in one cable having suitable insulation. Refer to Article 504.30 (B) of the National Electrical Code (ANSI/NFPA 70) and Instrument Society of America Recommended Practice ISA RP12.6 for installing intrinsically safe equipment.
- Intrinsically safe circuits must be wired and separated in accordance with Article 504.20 of the National Electrical Code (ANSI/NFPA 70) or other local codes, as applicable.
- This associated apparatus has not been evaluated for use in combination with another associated apparatus.
- Maximum barrier operating temperature for Temperature Class T4 is  $T_a = 60^\circ\text{C}$  except as follows:  
 $T_a = 50^\circ\text{C}$ : 9002/77-220-146-001      9002/77-220-296-001

WARNING: - Substitution of components may impair suitability for Division 2.

WARNING: - EXPLOSION HAZARD – Do not remove or replace back-up fuse(s) or disconnect non intrinsically safe wiring unless power has been switched off or the area is known to be non-hazardous.

Back-up fuse may only be replaced with R. STAHL part Art. no. 158964

The copying, distribution and utilization of this document as well as the communication of its contents to others without expressed authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or ornamental design registration.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadensersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Geschmackschutzregistrierung vorbehalten.

F 4830 503

			2001	Date	Name	Certification drawing	Scale
			Drawn by	5/01	Tobey		none
			Checked		Kaiser		Sheet
						Intrinsic Safety Barrier	1 of 4
						Type 9002/...-...-...-...-1	Agency
						90 026 11 31 3	UL
02	14.05.14	Bader					
01	12.08.09	Einsiedler					
Index	Date	Name				Rep. f.	Rep. t.
							A4









